KILOVIEW®

KILOLINK STATION PRO

ALL-IN-ONE HARDWARE BONDING RECEIVER & DEVICE MANAGEMENT PLATFORM

- Subscription-Free
- Broadcast-Ready
- Plug & Play
- Server-Free

The Definitive Hardware Solution for Bonded Video Reception

KiloLink Station Pro is Kiloview's dedicated hardware for wireless bonding reception, device management, and professional IP/SDI workifiows. Built with KiloLink Server Pro in a compact half- 1U design, it removes the need for servers, subscriptions, and system funing-delivering synchronized reception, flexible outputs, and simple control through a single, reliable platform. It is perfect for multi-camera field reports, educational broadcasts, and professional production workflows.

Plug & Play: Pre-configured with KiloLink Server Pro. Devices register instantly—no setup, commands, or Docker required.

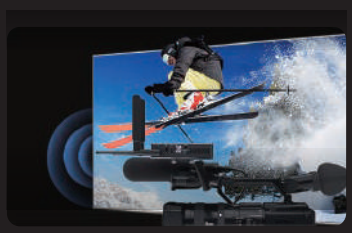

8-Channel Bonding: Simultaneously receive up to 8 × P3 or P3 Mini Wireless Bonding Encoders, ensuring stable multi-network transmission.

Broadcast-Ready Sync Outputs: 4 × 3G-SDI outputs with frame-accurate sync and 1× 4K HDMI multi-view or single-mode output for flexible monitoring, perfect for studios and OB vans.

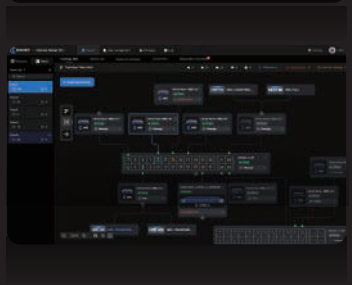

Visualized & Centralized Management: Paired with Kiloview AVX Media HUB, it can monitor device health, connectivity, and signal flow in real time, with centralized control and role-based security.

Multi-Protocol Support: Support NDI HX, SRT, RTMP, RTP/RTSP, and HLS, adapting streams for live, remote, and NDI workflows.

More Features

Local Recording & SSD

Compact Half-1U

Dual-NIC Redundancy

- User-Friendly Interface
- 24/7 Stability
- API for Easy Integration
- 3.5mm Audio Line Out
- Multiview Layout

Application

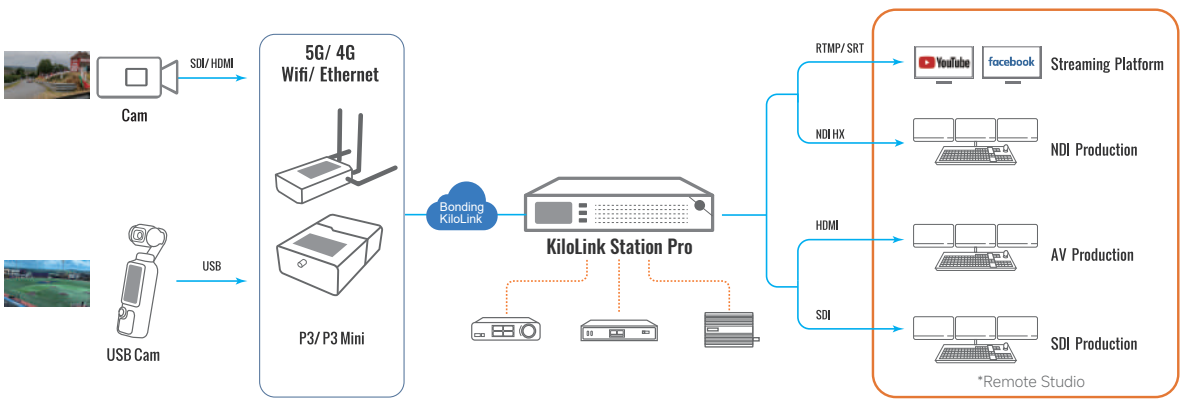

Broadcast & News



Sports & Live Events

Education & Campus

Remote Production

KiloLink Station Pro Tech Specs

Model	KiloLink Station Pro
Memory	16GB DDR4
Storage	128GB eMMC
Streaming Protocols	NDI HX, SRT, RTMP, RTP/RTSP, UDP and HLS
Video Decoding	H.264/H.265
Video Output	**4 x 3G-SDI:** Up to 1920*1080p60 (Downward compatible, includes 1080i50 support) **1 x 4K HDMI:** Up to 4KP60 (Downward compatible)
Bonding Performance	Supports connection of up to 8 × P3 units simultaneously
Audio Output	1 × 3.5mm Line Out
Multiview Layout	Supports up to 4-way split screen (Quad-view)
Network	1 × 5GbE RJ45 Ethernet 1 × 1GbE RJ45 Ethernet
Power Supply	DC 12V 3A
Management	Web-based UI Management
Dimensions	220 × 231.45 × 44 mm (Compact half-1U; two units can be rack-mounted as 1U)
Weight	≈ 1780 g (Standard Edition)

Please scan with browser.

Kiloview Electronics Co., Ltd.

☎ +86-155-7666-2088 info@kiloview.com www.kiloview.com

B1-101/102, Jiahua Intelligence Valley Industrial Park, 877 Huijin Road, Yuhua District, Changsha, China

Reminder: All photoes are for reference only, and specifications are subject to the physical product.